

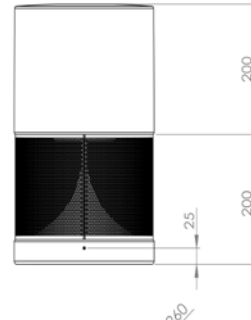
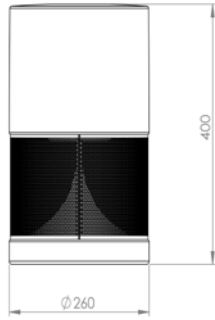


SN116

TecnoPolymer

OUTDOOR 360° LOUDSPEAKERS

Loudspeaker (8 Ω)

Loudspeaker
+ Led WhiteLoudspeaker
+ Led RGBLine transformer
G-Former™

Green	
Anthracite	
Gray	
White	
Corten effect	

SN116V	SN116V-W	SN116V-R
SN116A	SN116A-W	SN116A-R
SN116Y	SN116Y-W	SN116Y-R
SN116B	SN116B-W	SN116B-R
SN116Z	SN116Z-W	SN116Z-R

Code: **TRT055**

Material	TecnoPolymer
Type	Pneumatic suspension
Loudspeaker Ø (cm)	1 x 13,0
Power RMS (W)	50
Max Power (W)	100
Frequency response (Hz)	60 - 18K
Sensitivity dB (2,83V/1m)	88
Nominal impedance (Ω)	8
International Protection IP	35
Temperature range (°C)	-20 / +80
Dimensions H x W x D (cm)	40,0 x 26,0 x 26,0
Weight (Kg)	3,60

Nominal power (W)	50
-------------------	----

Input voltage (V) 70 / 100

Frequency response (Hz)	40 - 21K
-------------------------	----------

Output power on 8 Ω (W) 50,0-37,5-25,0

Dimensions H x W x D (cm)	7,2 x 7,2 x 3,8
---------------------------	-----------------

Weight (Kg) 0,41


The TRT055 is a 70V / 100V toroidal transformer specifically designed for outdoor use.

Ground anti-theft kit

Code
HRX031Dimensions H x W x D (cm)
33,0 x 15,0 x 10,0Marine
Speaker

	White LED	RGB LED
Power supply	24 V	24 V
Power	8,5 W	12 W
Dimmable	√	√
Led colour temperature	3000 K	Red - Green - Blue
Emission angle	120°	120°
Operating temperature	-20 °C (min) +45 °C (max)	-20 °C (min) +45 °C (max)

WHITE LED wiring diagram

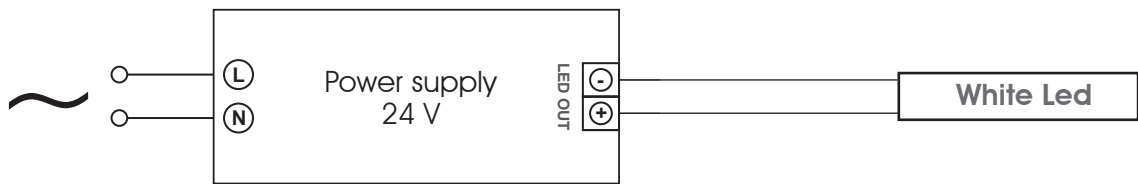

RGB LED wiring diagram

